

E3000

Wired room thermostat for any heating / air conditioning system.




- control of CH boilers or electrical devices
- temperature measured by two sensors
- both air and floor temperature sensors used to control heating device
- six temperature programs for each weekday, four programs for weekends
- two programming modes: 7d or 5/2d
- half-hour programming resolution
- temporary (comfort) temperature preset
- vacation mode: ability to program periods of 1-99 days differently
- Hold function maintaining the preset temperature regardless of programmed settings
- corrected temperature readings

Device controlled	CH systems
Power supply	3 V (2 AA alkaline batteries)
Rated load	16 (3,5) A 230 V 50 Hz
Receiver output	voltage-free SPDT relay
Temperature measurement range	-10°C...+45°C
Temperature control range	+5°C...+32°C - air / +10°C...+45°C - floor
Temperature control accuracy	0,5°C - air / 1°C - floor
Temperature reading accuracy	0,1°C
Temperature control hysteresis	0,5 / 1,0°C
Status visualization	LCD
Operating temperature range	+5°C...+45°C
Storage temperature range	0°C...+65°C
IP rating	IP 20, class II protection against electric shocks
Colour	white, RAL9010
Mount method	wall mounted, wall plugs
Weight (without batteries)	201 g
Certificates/standards	complies with the EMC and LVD Directives
Warranty period	2 years
Dimensions (W/H/D)	125/90/34
Packing list	Euroster 3000 thermostat, 2,5 m floor temperature sensor cable, wall plugs, instructions, batteries




EUROSTER 3000

THERMOSTAT

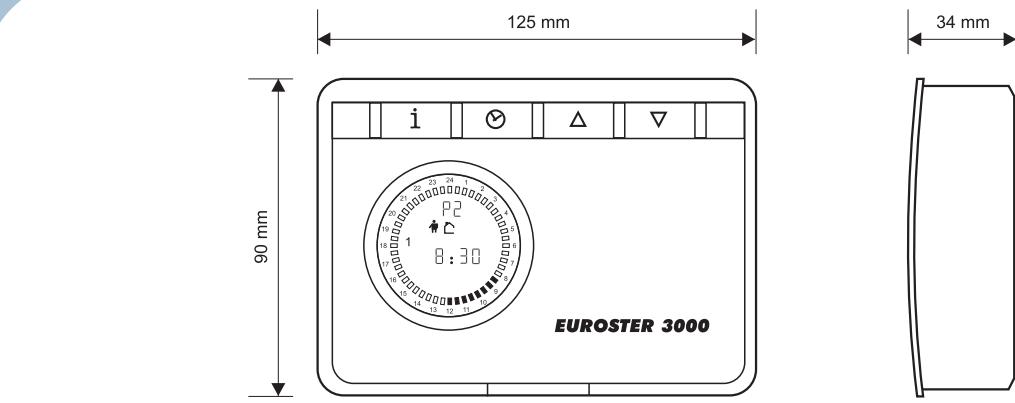


The simplified diagrams presented do not contain all of the elements necessary to correctly install the device.

GAS-FIRED BOILER

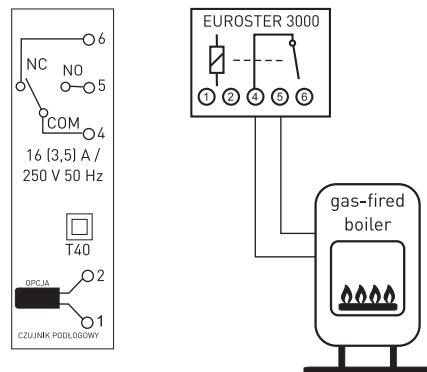

CH SYSTEM

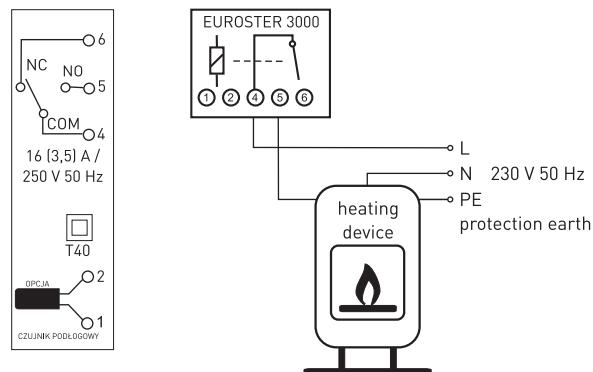

FLOOR HEATING SYSTEM

floor temperature sensor connected via 2,5 m cable

