

E11E


To control a central heating system circulation pump or DHW pump.



- boiler sweat prevention in CH mode
- preset DHW tank temperature in DHW mode
- transformer to increase safety
- dial to conveniently preset the temperature
- pump operation testing function
- corrected temperature readings
- Anty Stop function preventing idle pump rotor seizing

Device controlled	CH pump or DHW pump
Power supply	230 V 50 Hz
Rated output load	3 A 230 V 50 Hz
Rated power consumption	1,6 W
Temperature measurement range	0°C...+110°C
Temperature control range	+10°C...+80°C
Temperature control accuracy	1°C
Temperature control hysteresis	2°C...10°C
Status visualization	backlit LCD
Operating temperature range	+5°C...+40°C
Storage temperature range	0°C...+65°C
IP rating	IP 40
Colour	black
Mount method	wall-mounted, wall plugs
Weight (controller with cables)	0,54 kg
Certificates/standards	complies with the EMC and LVD Directives
Warranty period	2 years
Dimensions (W/H/D) mm	150/90/52
Packing list	Euroster 11E controller, wall plugs, instructions, mounting template, sensor band




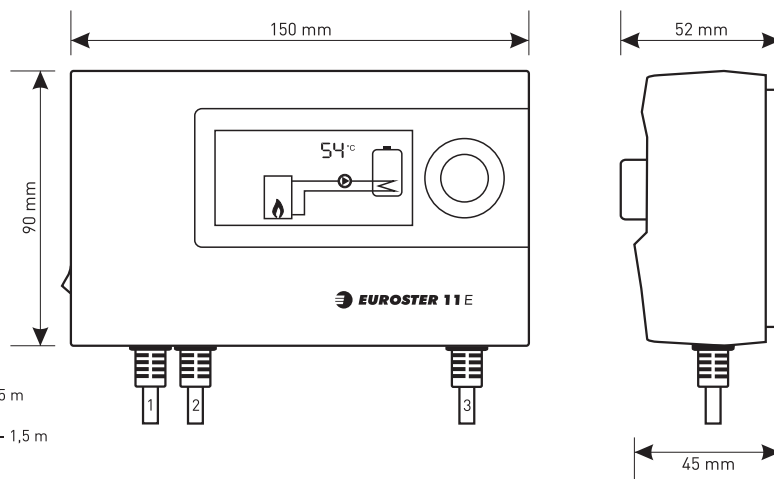

Cable length:
 1. Controller power - 1,5 m
 2. Pump power - 1,5 m
 3. Temperature sensor - 1,5 m


The simplified diagrams presented do not contain all of the elements necessary to correctly install the device. Do not immerse the temperature sensor in liquids or install it in a chimney flue gas exit.

CH PUMP CONTROL

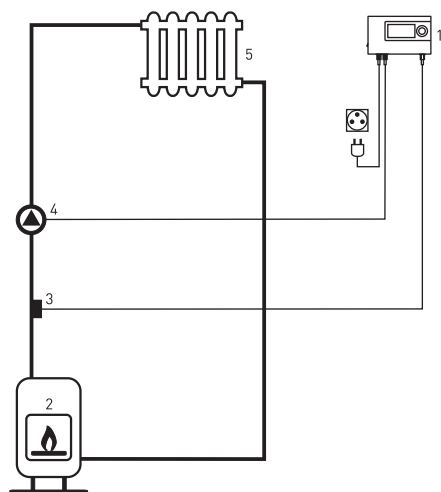


1. Euroster 11E controller
2. CH boiler
3. Temperature sensor
4. CH pump
5. Heat radiator

DHW PUMP CONTROL

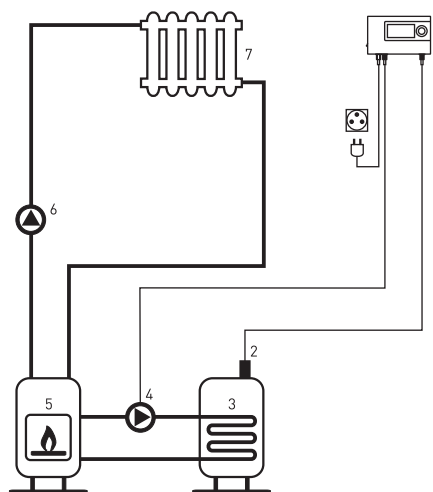

1. Euroster 11E controller
2. DHW temperature sensor
3. DHW tank
4. DHW pump
5. CH boiler (gas)
6. CH pump
7. Heat radiator

DHW CIRCULATION PUMP CONTROL (THIRD LINE)

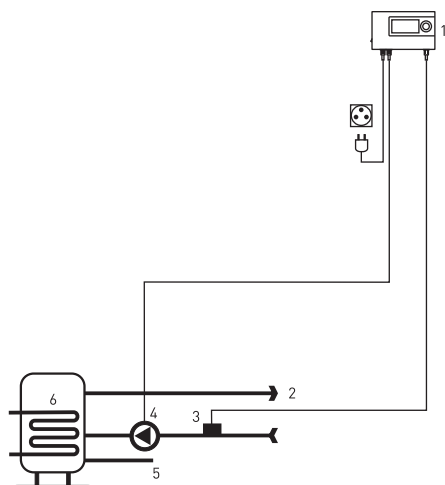

1. Euroster 11E controller
2. DHW circulation
3. Temperature sensor
4. Circulation pump
5. Cold water inlet
6. DHW tank