


Wired room thermostat for all types of heating devices.




- Three temperature levels: comfort, economical and reduced (away),
- Large, legible, backlit LCD,
- 0.5-hour accuracy of range programming,
- Numerous useful functions: temporary temperature setting, keypad interlock, constant temperature, vacation mode, discharged batteries indication,
- Temperature reading accuracy of 0.1 °C,
- Possibility to switch the thermostat off with an active frost protection temperature after the heating season,
- Temperature reading correction,
- Display contrast control,
- 24-hour clock,
- Operation with window opening sensors (airing function) with selectable activity status (NC/NO).

Controlled device	Heating systems
Supply voltage	3 V – 2 pieces of alkaline AA batteries
Maximum load	10(3.5 A) 250 V 50 Hz
Thermostat output	relay, voltage-free type, SPDT
Temperature measurement range	0 °C...+50 °C
Temperature adjustment range	+5 °C...+35 °C
Temperature adjustment accuracy	0.2 °C
Temperature reading accuracy	0.1 °C
Hysteresis range	0.2/0.4/0.5/0.6/0.8/1.0 °C, default setting 0.5 °C
Visual signalization	backlit LCD
Operation/storage temperature	+5 °C...+45 °C / -10 °C...+60 °C
Ingress protection rating	IP 20
Color	White
Mounting method	Wall-mounted, screw anchors
Thermostat weight without batteries	195 g
Standards, approvals, certificates	Conformity to EMC, LVD, RoHS
Thermostat class	I
Contribution to energy efficiency	1%
Warranty period	2 years
Dimensions (width/height/depth) mm	120/112/27
Thermostat kit	Euroster 6060 Thermostat, Screw Anchors, Batteries, User Manual with Warranty Certificate

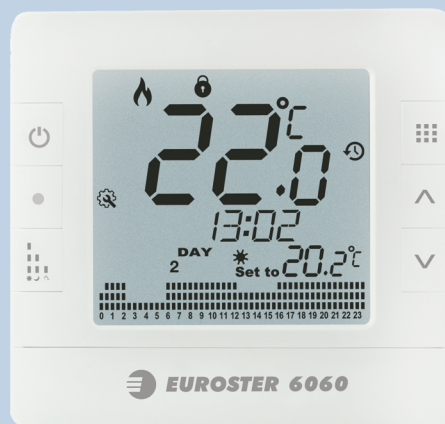


EUROSTER 6060

THERMOSTAT

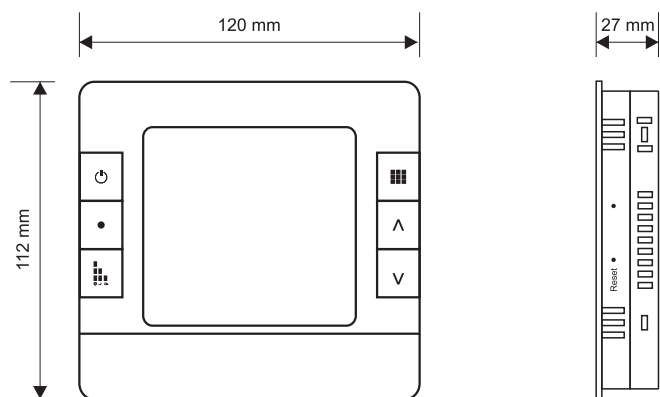

The following diagrams are simplified and do not cover all the elements necessary for the correct installation.

IN A SYSTEM WITH A GAS BOILER

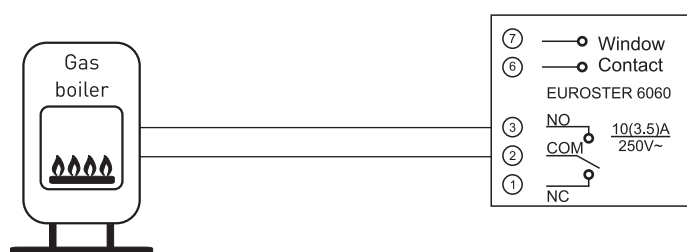

IN A HEATING SYSTEM

