

# eFH1


Heating Zone Controller.



- cooperates with a room thermostat
- controls the CH pump,
- controls the boiler – dry contact
- bimetal (thermal) sensor input – circuit overheating protection.

Controlled device	CH boiler and pump
Supply voltage	230 V 50 Hz
Maximum load	2 A 230 V 50 Hz
Maximum power consumption	0.1 W
Operation temperature	+5 °C...+40 °C
Storage temperature	-10 °C...+45 °C
Ingress protection rating	IP 20
Visual signalization	LED
Color	gray
Mounting method	wall-mounted, screw anchors
Weight	140 g
Dimensions (width / height / depth) mm	90/75/42
Warranty period	2 years
Standards, approvals, certificates	Conformity to EMC, LVD, RoHS
Thermostat kit	Euroster FH1 controller, power cable, screw anchors, User Manual with Warranty Certificate



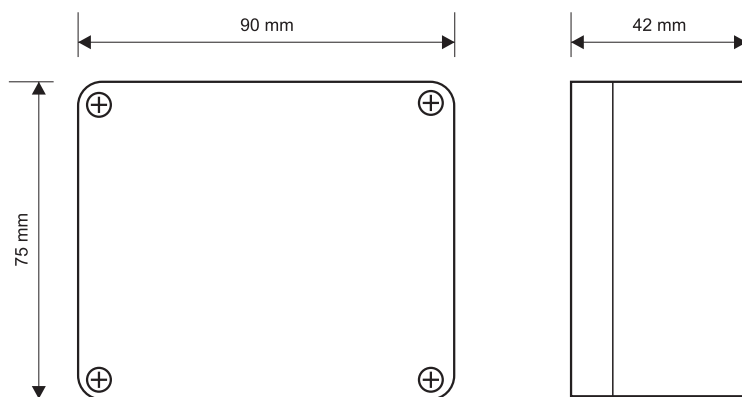

The following diagrams are simplified and do not cover all elements necessary for the correct installation.

### SAMPLE CONNECTION DIAGRAM

