


# EFH2


2 heating zone module

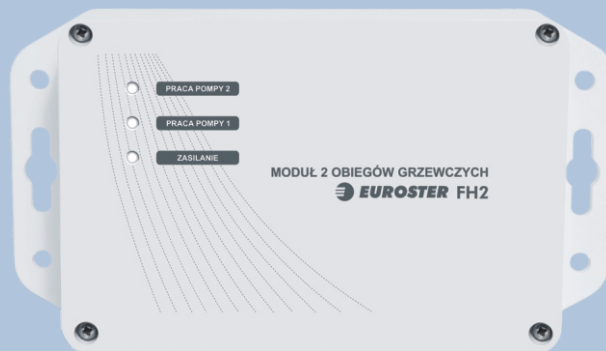

- Cooperates with two room thermostats,
- Controls the operation of two heating zones equipped with CH pumps,
- Controls boiler – voltage-free contact,
- Provides zone overheating protection – includes bimetallic sensor (bimetallic circuit breaker) inputs.

Controlled device	2 pumps and CH boiler
Supply voltage	230 V 50 Hz
Maximum load	2 A 230 V 50 Hz
Operation temperature	+5°C...+40°C
Storage temperature	-10°C...+45°C
Ingress protection rating	IP 20
Color	gray
Mounting method	wall-mounted
Dimensions (width / height / depth) mm	152/82/46
Weight	175 g
Warranty period	2 years
Kit contents	Euroster FH2, 2 m-long power cable, Screw anchors, User Manual with Warranty Certificate



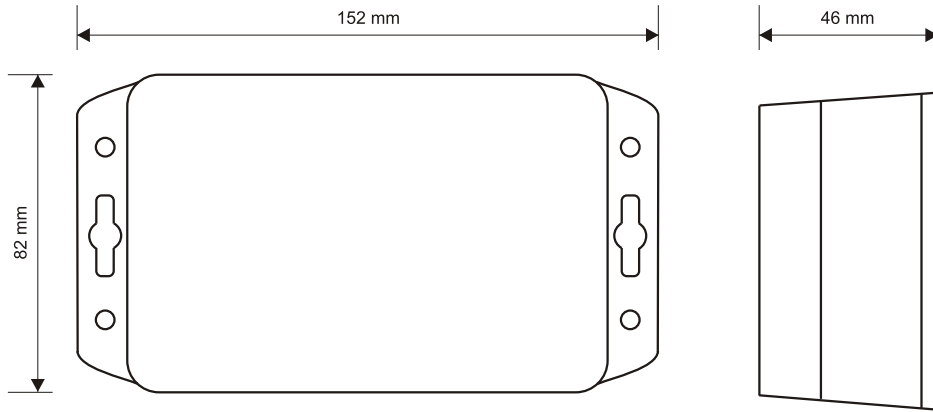

The following diagram is simplified and does not cover all the elements necessary for the correct operation of the system.

## CONNECTION DIAGRAM

